

# Extron® Electronics

INTERFACING, SWITCHING AND DISTRIBUTION



**DVS 204 - DIGITAL VIDEO SCALER**

Four inputs, dual outputs

3:2 and 2:2 pulldown with True Rate™ recovery

Dynamic Motion Interpolation (DMI™)

Accu-Rate Frame Lock (AFL™)

Aspect Ratio conversion with memory presets

Optional Serial Digital Interface (SDI) input

33 Scalable output rates

Quad-standard video decoding

RS-232 control

Compatible with HDTV and digital displays



[www.extron.com](http://www.extron.com)

# DESCRIPTION

---

The Extron DVS 204 digital video scaler incorporates the latest in high performance, proprietary scaling technology from Extron Electronics with the input flexibility essential for today's top-notch audio/visual applications—including an optional Serial Digital Interface (SDI) input. With its 33 selectable output rates, including a variety of HDTV rates, the DVS 204 is the perfect scaling solution for A/V environments such as boardrooms, conference rooms, and home theaters, as well as rental and staging applications.

There are two models in the DVS 204 line—the DVS 204 and the DVS 204 D. Each model supports the following video formats on one of four inputs: an RGB pass through, component, S-video, and composite video. The “D” (digital) version also supports SDI input signals. For all models, RGB or component video is output simultaneously on one female 15-pin HD connector and female BNCs.

To enable superior scaling performance, the DVS 204 features several of Extron's latest proprietary technologies: Dynamic Motion Interpolation (DMI™), 3:2 and 2:2 pulldown detection (patent pending), True Rate™, and patented Accu-RATE Frame Lock™. Key features include aspect ratio control to accommodate different movie formats, memory recall for up to three presets per input, and vertical blanking adjustments.

The DVS 204 digital video scaler is housed in a rack mountable, 1U high, 1/2 rack width metal enclosure. Control of these scalers is provided via front panel and RS-232 control. The DVS 204 scalers can also be controlled remotely through an optional IR 901 remote. The front panel buttons control video input selection and picture adjustments. All functions are available through RS-232 using Extron's user-friendly Simple Instruction Set (SIS™).

# FEATURES

---

- **Input and Pass-through connectors** – Input one accepts composite video on one female BNC; input two accepts composite, S-video, or component on three females BNCs; input three accepts S-video on a 4-pin mini-DIN; input four accepts an RGB pass-through or RGBcvS signal on female 15-pin HD female. The optional SDI card can be configured for any of the four inputs.
- **3:2 and 2:2 pulldown detection (Patent Pending)** – 3:2 pulldown detection for NTSC and 2:2 film detection for PAL is an advanced film mode processing technique. It helps maximize image detail and sharpness for NTSC or PAL sources that originated from film. When such materials are

# FEATURES

---


detected, this technology applies video processing algorithms that optimize the conversion of film-based video—resulting in richly detailed images with sharply defined lines.

- **True-Rate™** – Recovers the natural motion dynamics of material that originated from film.
  - **Dynamic Motion Interpolation (DMI™)** – DMI technology is an advanced motion detection and compensation method used to deliver the best aspects of still and motion algorithms. This process results in a superior level of image enhancement capability with no loss of image fidelity.
  - **Accu-RATE Frame Lock (AFL™)** – A technology exclusive to Extron that solves frame rate conversion issues experienced by video scalers. When video input and output refresh rates differ, there are certain points in time when the two rates cross over each other. The result is a glitch or image freeze on the display. AFL solves this problem by locking the output frame rate to the input frame rate.
  - **Scaled outputs** – The DVS 204 offers 33 different output rates. (see list in specifications).
  - **Aspect ratio conversion** – Ability to horizontally and vertically size any video input to meet a specific aspect ratio. 3 memories for aspect ratio are available for each input by pushing each input button repeatedly.
  - **Quad-standard video decoding compatibility** – The DVS 204 uses a digital, four-line adaptive comb filter to decode NTSC 3.58, NTSC 4.43, PAL, and SECAM.
  - **SDI input card** – Optional SDI Serial Digital Interface input available.
  - **Picture controls** – Brightness, contrast, color, tint, horizontal and vertical sizing, and horizontal and vertical centering are available per input for fine picture adjustments.
  - **Vertical blanking** – Variable top and bottom vertical blanking eliminates edge noise caused by tapehead switching and captioning.
-

# FEATURES (Cont.)

- **Executive mode** – The DVS 204 features a reduced function mode that locks out all front panel functions except for input selection; all functions, however, remain active through RS-232.
- **RS-232 control** – A rear panel, RS-232 control port provides integration of the DVS 204 into third-party control systems.
- **Display compatibility** – The DVS 204 scalars are compatible with display devices such as VGA/SXGA monitors, HDTV devices, LCDs, DLPs, or plasma displays.
- **Simple Instruction Set (SIS™)** – Extron's SIS™ is a set of basic ASCII code commands that provide simple control through a third-party control system. Instead of programming in long, obscure strings of code, SIS makes it easy to operate an Extron product using RS-232 control.
- **Internal international power supply** – The 100-240VAC, 50/60 Hz, auto-switchable internal power supply of the DVS 204 provides worldwide power compatibility.

## APPLICATION DIAGRAM

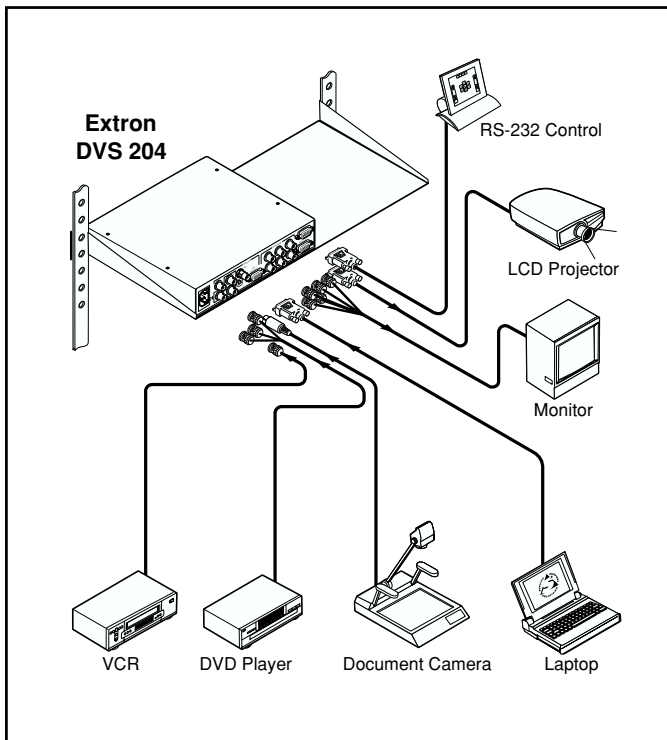

# SPECIFICATIONS

## Video input

Number/signal type .....	1 (RGBHV, RGBS, RGsB) pass-through, RGBS, RGBcvs 1 composite video, S-video, component video (Y, R-Y, B-Y) 1 S-video, 1 SDI (optional, DVS 204D only) 1 composite video
Connectors .....	1 15-pin HD female RGB pass-through, RGBS, RGBcvs 3 BNC female: component video 1 BNC female: SDI (DVS 204D, DVS 204D 12V only)
1 4-pin mini-DIN female.....	S-video
1 BNC female .....	composite video
Min/max levels .....	Analog— 0.0V to 1.0V p-p with no offset
Impedance .....	75 ohms
Horizontal frequency .....	NTSC 3.58, NTSC 4.43, PAL, SECAM
Vertical frequency .....	NTSC 3.58, NTSC 4.43, PAL, SECAM
Resolution range .....	NTSC 3.58, NTSC 4.43, PAL, SECAM
Return loss.....	-30dB @ 5 MHz
Maximum DC offset .....	1.5V

## Video processing

Encoder .....	9 bit digital
Digital sampling .....	24 bit, 8 bits per color; 13.5 MHz standard
Colors .....	16.78 million

## Video output

Number/signal type .....	1 scaled RGBHV, RGBS, RGsB, component video (Y, R-Y, B-Y) 1 scaled RGBHV or pass-through RGBHV/RGBS/RGsB
--------------------------	--

## Output rates

Connectors .....	6 female BNC 1 female 15-pin HD
Min/max levels .....	0.0V to 0.7V p-p
Impedance .....	75 ohms
Scaled VGA resolution.....	640x480 <sup>1,3,4,5,6</sup> , 800x600 <sup>1,3,4,5,6</sup> , 848x480 <sup>1,3,4,5,6</sup> , 852x480 <sup>1,3,4,5,6</sup> , 1024x768 <sup>1,3,4,5,6</sup> , 1280x768 <sup>2,3,5,6</sup>

# SPECIFICATIONS

1280x1024<sup>1,3,4,5</sup>, 1360x765<sup>1,3,4,5,6</sup>,  
 1365x1024<sup>1,3,4,5</sup>, HDTV 480p<sup>3,5</sup>,  
 720p<sup>3,5</sup>, 1080p<sup>3,5</sup>, and 1080i<sup>3,5</sup>  
<sup>1</sup> = at 50 Hz, <sup>2</sup> = at 56 Hz  
<sup>3</sup> = at 60 Hz, <sup>4</sup> = at 75 Hz  
<sup>5</sup> = locked to the current input's  
 vertical refresh rate  
<sup>6</sup> = True Rate

## Sync

Input type ..... RGBHV, RGBS, RGsB, RGBcvs  
 Output type..... RGBHV, RGBS, RGsB  
 Standards..... NTSC 3.58, NTSC 4.43, PAL,  
 SECAM  
 Input level ..... 0V to 1.0V p-p  
 Output level ..... TTL 5.0V p-p  
 Input impedance ..... 75 ohms  
 Output impedance..... 75 ohms  
 Max input voltage ..... 5V p-p  
 Max. propagation delay ..... 20 nS  
 Polarity ..... Positive or negative (switch-  
 selectable)

## Control/remote — decoder/scaler

Serial control port ..... RS-232, 9-pin female  
 D connector  
 Baud rate and protocol ..... 9600, 8-bit, 1 stop bit, no parity  
 Serial control  
 pin configurations ..... 1 = input 1 select  
 2 = TX  
 3 = RX  
 4 = input 2 select  
 5 = GND  
 6 = input 3 select  
 7 = input 4 select  
 8 = n/a  
 9 = hardwired IR  
 Contact closure ..... 9-pin female D connector (same  
 as RS-232 connector)  
 Contact closure  
 pin configurations ..... See pins 1, 4, 6, and 7 above.  
 IR controller module ..... Extron IR 901 (optional)  
 Program control..... Extron's control program for  
 Windows® Extron's Simple  
 Instruction Set™ – SIS™

## General

### Power

DVS 204, DVS 204D .... 100VAC to 240VAC, 50/60 Hz,  
 30 watts, internal, auto-  
 switchable  
 DVS 204/204D 12VDC.. 100VAC to 240VAC, 50/60 Hz,  
 36 watts, external, auto-  
 switchable; to 12VDC,  
 3 A power supply. Product  
 requires 2 A.

### Temperature/humidity

All models ..... Storage -40° to +158°F (-40° to  
 +70°C) / 10% to 90%,  
 non-condensing  
 DVS 204, DVS 204D .... Operating +32° to +113°F (0° to  
 +45°C) / 10% to 90%,  
 non-condensing  
 DVS 204/204D 12VDC.. Operating +32° to +122°F (0° to  
 +50°C) / 10% to 90%,  
 non-condensing

Rack mount..... Yes, with optional rack shelf, part  
 #60-190-01

Enclosure type ..... Metal

Enclosure dimensions ..... 1.75" H x 8.75" W x 9.5" D  
 (1U high, 1/2 rack width)  
 4.4 cm H x 22.2 cm W x 24.1  
 cm D (Depth excludes connectors  
 and knobs. Width excludes rack  
 ears.)

Product weight..... 3.3 lbs (1.5 kg)

Shipping weight..... 6 lbs (2.7 kg)

Vibration ..... ISTA/NSTA 1A in carton  
 (International Safe Transit  
 Association)

Listings ..... UL, CUL

Compliances ..... CE, FCC Class A, VCCI,  
 AS/NZS, ICES

MTBF ..... 30,000 hours

Warranty ..... 3 years parts and labor

## Model

DVS 204 ..... 60-442-01  
 DVS 204 D..... 60-442-02

## Part Numbers



Extron Electronics, USA  
 1230 South Lewis Street  
 Anaheim, CA 92805  
 800.633.9876 714.491.1500  
 FAX 714.491.1517

Extron Electronics, Europe  
 Beeldschermweg 6C, 3821 AH Amersfoort  
 The Netherlands  
 +800.3987.6673 +31.33.453.4040  
 FAX +31.33.453.4050

Extron Electronics, Asia  
 135 Joo Seng Rd. #04-01  
 PM Industrial Bldg.  
 Singapore 368363  
 +65.6383.4400 FAX +65.6383.4664

Extron Electronics, Japan  
 Daisan DMJ Bldg. 6F, 3-9-1 Kudan Minami  
 Chiyoda-ku, Tokyo 102-0074  
 Japan  
 +81.3.3511.7655 FAX +81.3.3511.7656