


CRT

DTV-1101

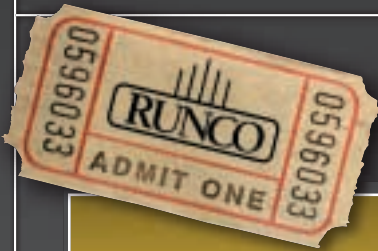

RUNCO INTERNATIONAL
CRT TECHNOLOGY

HDTV

HIGH DEFINITION
FULLY COLOR CORRECTED AND FILTERED LENSES
EYE-Q™ AUTO-CONVERGENCE
RS-232 CONTROLLABLE



DTV-873



DTV-940



DTV-947



DTV-992/992 ULTRA



The World's Finest Home Theater Products™

The DTV-1101 is the flagship model in the CRT line. The reasons are obvious: Its features include 9-inch CRTs, capable of TRUE high-definition television, including 1080 x 1920 and 720 x 1280. Its CRTs are coupled with fully color-filtered C-elements, and combined with its color-corrected high-definition lenses, the color reproduction is nothing short of spectacular. In addition, the unit's electromagnetic focus system and accurate 25-point zone convergence ensure the maximum resolution capability possible from a CRT projector. Finally, this unit comes equipped with the EYE-Q™ auto convergence system for easy touch-ups.

FEATURES

- 9-Inch CRTs
- Fully HDTV Capable
- Multiple Aspect Ratios
- EYE-Q™ The Intelligent way to converge
- Highest Resolution Capabilities
- RS-232 controllable

SPECIFICATIONS

Scan Frequency:	Horizontal: 15–75 KHz autolock Vertical: 37–155 Hz	Configurations:	Front or rear, floor or ceiling mount
Optical Resolution:	HD-120 lenses, 12 line pairs per mm, 1250 TV lines	Aspect Ratios:	Anamorphic, widescreen, 4:3
Video Standards:	NTSC (PAL/NTSC Export version)	Contrast Ratios:	100:1 (JIS Method) 20:1 (HDTV Method)
Video Resolution:	1250 TV lines	High Voltage:	32.7 Kv
Retrace Time:	Horizontal: 2.5 μS Vertical: 200 μS	Convergence:	Digital zone convergence with 25 individual zones
Bandwidth:	120 MHz (-3 dB)	Power Requirements:	110 VAC, 50/60 Hz (220V Export model)
CRTs:	9-inch, high definition, liquid coupled tubes with electromagnetic focus and color filters	Power Consumption:	590 W
Lenses:	Super high definition, fully color corrected F1.15 lenses	Cabinet Dimensions:	Width: 31 in./787.40 mm Depth: 46.25 in./1174.75 mm Height: 14 in./355.60 mm Weight: 204 lbs./92.53 mm
Inputs:	Component/RGB	Safety Regulations:	Complies with: UL, FCC Class 'B', CE, C-Tick
Color Balance:	Four user selectable settings: 3200 K, 5400 K, 6500 K, 9300 K. All settings can be customized	Storage:	10–122° F (-12–50° C)
Input Memories:	32 separate memories with 8 memories per scan frequency	Operating Environment:	32–104° F (0–40° C)
Internal Setup Pattern:	Crosshatch	Humidity:	0–90% non-condensing
Light Output:	1250 lumens/240 ANSI lumens	Included Accessories:	Remote control, AC power cord, and Owner's Operating Manual
Picture Size:	90–300 in. (4:3) diagonal		
Throw Distance:	1.38 x width (widescreen) 1.45 x width (standard 4:3)		

Call factory for more specific information on export specifications.
Specifications are subject to change without notice.



**THE WORLD'S FINEST
HOME THEATER PRODUCTS™**

Runco International®
2463 Tripaldi Way, Hayward CA 94545
Tel: 510-293-9154 • Fax: 510-293-0201
www.runco.com