

1

2

3

4

5

6

D

D

C

C

B









B

A


A

PROJECT: 02-260315-04P		PCB: 50-002015-02P		
REVISION HISTORY				
ISS	RFC No	DESCRIPTION	DATE	APP
01	-----	ORIGINAL	TP 23MAY95	MP
02	50640	SIG NAME ADJUSTMENTS	TP 11DEC95	AK
03	60226	TEXT ADJUSTMENTS	TP 20MAY96	AK
04	90549-E	C1 WAS 50V AXIAL NOW 100V RADIAL	MP 15JUL99	
05				
06				
07				
08				
09				
10				



NOTES:

- UNLESS OTHERWISE SPECIFIED:
1/8W 5% FOR SURFACE RESISTORS
1/2W 5% FOR THROUGH RESISTORS
50V 5% FOR ALL CAPACITORS
- THE FOLLOWING DENOTE CONNECTOR IDENTITIES:
 MALE
 FEMALE
 HARNESS
- "H" AT COMPONENT DENOTES A HEATSINK.
- "SKT" DENOTES SOCKETED INTEGRATED CIRCUIT.
- "SM" IDENTIFIES SURFACE MOUNT PARTS.
- PCB SENSITIVE TO ELECTROSTATIC DISCHARGE.
- ARROWS ON SIGNAL LINES INDICATE THE DIRECTION OF FLOW.

- SHIELDED AREAS AS SHOWN.

- THE FOLLOWING DENOTE GROUND IDENTITIES:
 DIGITAL
 ANALOGUE
 CHASSIS
- "DNP" IDENTIFIES THE FOLLOWING PARTS THAT ARE NOT TO BE POPULATED:
JMP1

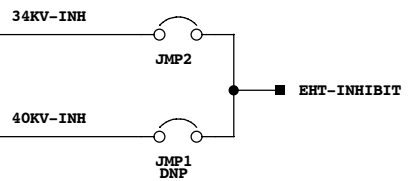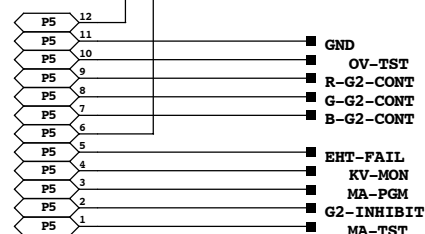
LVPS CONNECTOR





HVPS CONNECTOR



IR SENSOR CONNECTOR




INTERNAL KEYPAD CONNECTOR



HIGHEST	REFERENCE DESIGNATORS				NOT USED	
C1	J8	JMP2	P9	P1	P6-8	
U1						

CAUTION

FOR CONTINUED SAFETY, REPLACE ALL COMPONENTS NOTED BY  WITH EXACT REPLACEMENT PARTS ONLY! CONSULT SERVICE MANUAL FOR REPLACEMENT TYPE!

1

2

3

4

5

